

## Portable Compressors **MOBILAIR M 50**

With the world-renowned SIGMA PROFILE 

Free air delivery 5.0 m<sup>3</sup>/min



**Worldwide sales and servicing network**



As one of the world's largest compressor manufacturers, KAESER KOMPRESSOREN is represented throughout the world by a comprehensive network of branches, subsidiary companies and authorised partners in over 60 countries.

With innovative products and services, Kaeser Kompressoren's experienced consultants and engineers help customers

to enhance their competitive edge by working in close partnership to develop progressive system concepts that continuously push the boundaries of performance and compressed air efficiency. Moreover, the decades of knowledge and expertise from this industry-leading system provider are made available to each and every customer via the Kaeser group's global computer network.

These advantages, coupled with KAESER's worldwide service organisation, ensure that all products operate at the peak of their performance at all times and provide maximum availability.

**Maximum versatility**

The MOBILAIR 50 is the ideal choice for powering equipment such as breakers and impact borers. Meticulous construction and premium quality components ensure trouble-free operation in ambient temperatures ranging from -10 °C to +50 °C. Moreover, low temperature versions are available for use in temperatures as low as -25 °C. Versatility is further enhanced by the chassis, as it can be equipped with or without an overrun brake and is available with a fixed or height adjustable tow bar. Stationary versions can be installed either on skids or machine mountings (all stationary systems feature a metal enclosure).



**The perfect energy-saving combination:  
Kubota engines and KAESER airends**

The M 50 features a specially designed energy-saving SIGMA profile airend, which is directly driven by a water-cooled four-cylinder Kubota diesel engine. Direct drive eliminates the transmission losses associated with other systems, consequently providing more air for less fuel.

Separate air filters for engine and compressor: The air filters are specially tailored to suit required air demand and therefore ensure dependable system operation. A further important design detail is the electric fuel pump which enables quick and simple deaeration of the diesel lines. Laborious manual pumping is therefore eliminated.

**MOBILAIR M 50**  
**Lightweight – Quiet – Powerful**



**Lightweight**

Powerful doesn't necessarily mean heavy. The M 50 has a low operational weight of less than 750 kg and is therefore incredibly simple to manoeuvre and transport. Moreover, it's 80 litre diesel fuel capacity ensures that the M 50 has more than enough power available to last an entire work shift.



**Service Friendly**

The enclosure opens to provide excellent component access and therefore greatly simplifies all servicing and maintenance tasks.



**PE enclosure**

Made from rotation-sintered polyethylene, the double-walled sound enclosure ensures long-term value retention and is both corrosion and scratch-resistant.



**Metal enclosure**

The sound-proofed all-steel enclosure ensures long-term corrosion resistance and value retention thanks to high quality zinc priming and tough powder coating. Stationary systems are always equipped with metal enclosures.



**Alternative colours**

The corrosion- and scratchproof rotation sintered polyethylene enclosure is also available in the following colours:  
Blue - Equivalent RAL 5017  
Green - Equivalent RAL 6024  
Red - Equivalent RAL 3020  
Orange - Equivalent RAL 2009  
Other colours for the enclosure and custom paintwork for metal components are available upon request.



**User-friendly operation**

Operation is made simple via user-friendly icons and a single start switch with pre-heat function. The unit also features fully automatic monitoring and shutdown, whilst a pressure gauge and airend temperature display enable all information to be viewed at a glance.



**Patented Anti-Frost Control**

Specially developed for portable compressors, the patented Anti-Frost Control automatically adjusts operating temperature in relation to ambient. This prevents air tools from freezing up and significantly extends their service life.






## Hose reel

The optional pre-installed hose reel holds 20m of lightweight hose which does not have to be fully reeled out for operation. As the hose is installed within the compressor unit, this not only enhances hose service life and availability, but also protects it from damage (splitting, stretching, being run over) and contamination.

## Dimensions

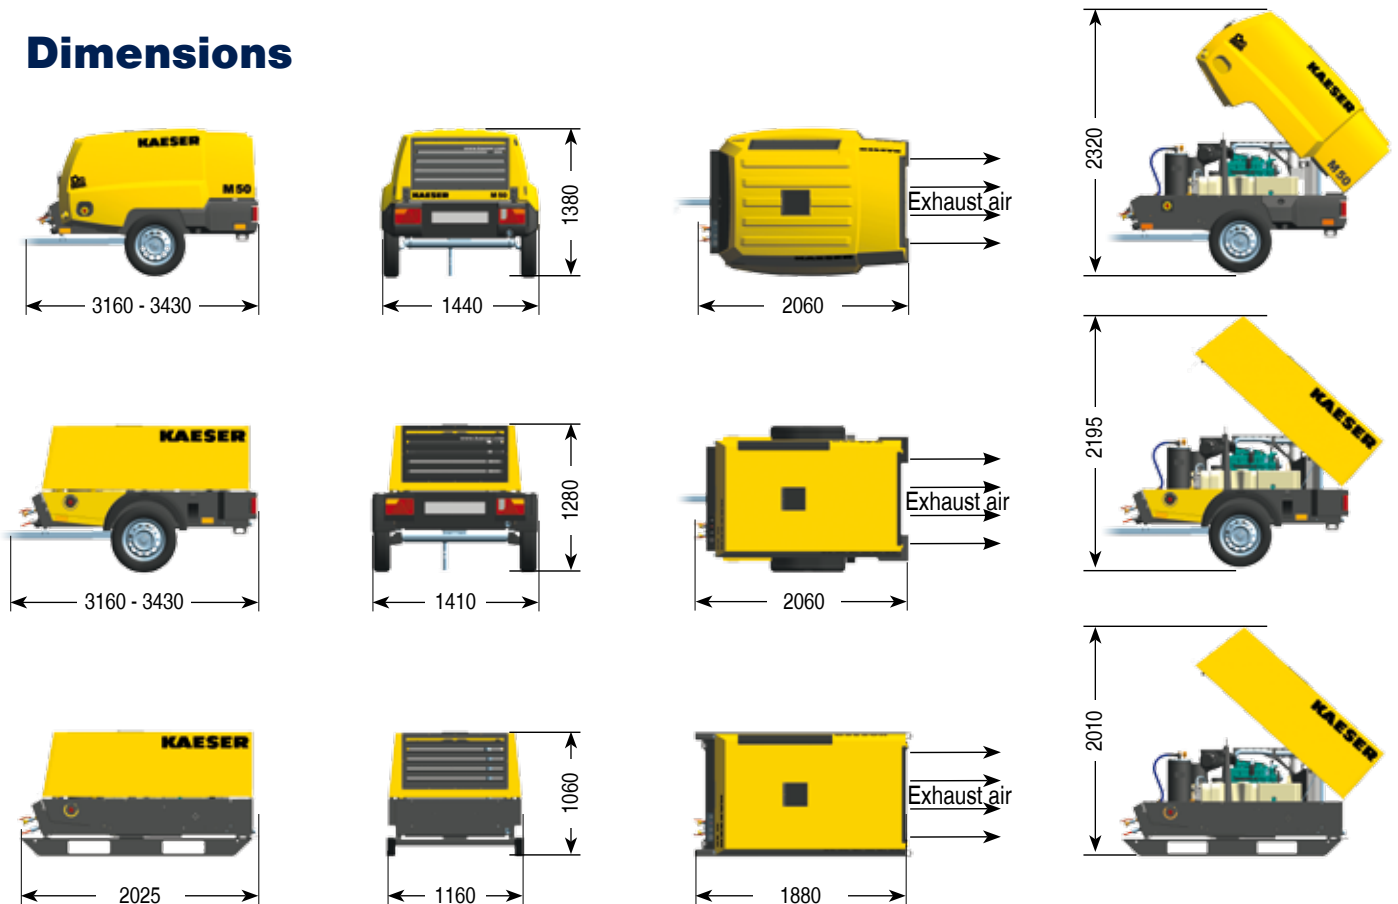

## Technical Specifications

Model	Compressor unit		4-cylinder diesel engine (water-cooled)					Complete unit				
	Free air delivery m <sup>3</sup> /min	Working pressure bar	Make	Model	Rated engine power kW	Speed at full load rpm	Idling speed rpm	Fuel tank capacity l	Operational weight kg	Sound power level dB(A)*	Sound pressure level dB(A)**	Air outlet
M 50	5.0	7	Kubota	V1505-T	32.5	3000	2200	80	735	< 98	69	2 x G <sup>3</sup> / <sub>4</sub> 1 x G1

\*) Guaranteed sound power level to directive 2000/14/EU - \*\*) Surface sound pressure level to ISO 3744, (r = 10 m)



*Built for a Lifetime!*

**KAESER COMPRESSORS Australia Pty. Ltd.**  
 Locked Bag 1406 – Dandenong South – Vic. 3164  
 45 Zenith Road – Dandenong – Vic. 3175  
 Phone: +61 3 9791 5999 – Fax: +61 3 9791 5733  
 www.kaeser.com – E-mail: air@kaeser.com.au